

4 Bar ISO Tank Container Flanges

All Swift weld pad flanges are designed to fit the various different types of valves currently produced

FLANGE TYPES

- **Bottom Discharge Weld Pads**
 - 3" 45° Bottom Discharge Weld Pad (Steam heated, or non-steam heated).
 - 3" 30° Bottom Discharge Weld Pad (Steam heated, or non-steam heated).
- **1.5" Air inlet Weld Pad**
- **2.5" PRV/SRV Weld Pad**
 - Screwed or flange type valve.
 - Burst disc adaptor flange available (with or without gauge guard).
- **3" Top Discharge Weld Pad**
 - Options available with or without siphon provision.
 - Variou drilling patterns are also available.
- **3" Spare Connection Weld Pad**

Blind flanges to suit all types of weld pads are available.
Recessed weld pad options are also available.

SPECIFICATIONS

All flanges are tolerance to ANSI B16.5 U.O.S.

TESTING

All steam heated flanges are individually pressure tested to 20 bar.

MARKINGS

All flanges are laser etched with the following details:


- Swift logo
- Flange part number
- Material heat number(s)
- Material specification / code
- Serial numbers / production date

MATERIAL

All flanges are manufactured from 316/316L & 1.4404/1.4401 stainless steel

FINISH

All flanges are pickled and passivated.

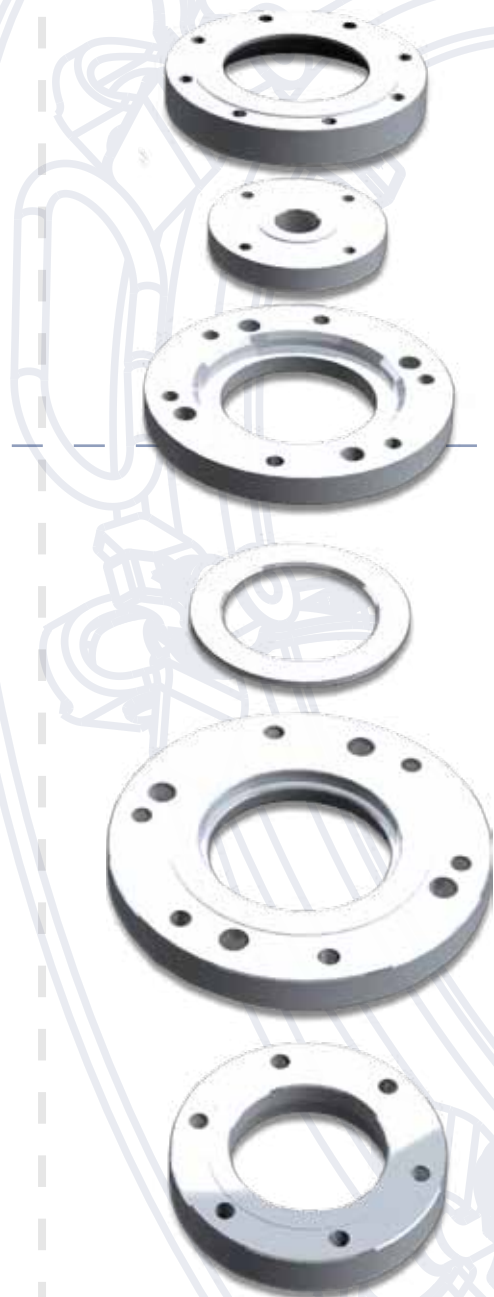

7 Compagne Street
Kuils River, Cape Town
South Africa, 7580

Tel: +27 (0)21 906 2270
Fax: +27 (0)21 906 2944

E-mail: swift@swifteng.co.za
www.swifteng.co.za



Specialist Manlid Manufacturers